



# Preparing Medical (Polyvinyl Alcohol-Iodine) As A Pressure Sensor and Investigating Its Physical Properties

Auda Jabbar Braihi \*, Jaleel Kareem Ahmed, Dalal abbass Kadham

Polymer and petrochemical industries, college of Engineering material, Babylon University, Iraq

## ABSTRACT

In this paper, polyvinyl alcohol-iodine (PVA: I<sub>2</sub>) mixtures were prepared by adding 2, 4 and 6 wt. % of I<sub>2</sub> to the PVA matrix. Piezoelectricity, dielectric parameters (D.C conductivity, dielectric constant, dielectric loss, A.C conductivity), X-Ray diffraction (XRD) and Differential Scanning Calorimetry (DSC) were measured. The decisive factor (DF) concept was used to evaluate and specify the types of the destroyed bonds due I<sub>2</sub> addition.

Results showed that the D.C conductivity increases with I<sub>2</sub> content temperature as well as this conductivity increases with rising temperature up. The dielectric constant decreases with the angular frequency. The A.C conductivity increased with I<sub>2</sub> content as well as angular frequency.

I<sub>2</sub> addition shifted the crystallinity peak to higher position, decreased the d spacing and increased the crystallite size. DSC analysis showed that the T<sub>g</sub> decreased with increasing I<sub>2</sub> content followed by decreasing the decisive factor. This analysis also proved that all destroyed bonds due I<sub>2</sub> addition are secondary forces type namely, London forces. Composite sample, especially 6 wt. % sample exhibited piezoelectric phenomenon.

**Key Words:** PVA, Iodine, Film, Activation energy, Piezoelectricity.

eIJPPR 2017; 7(1):34-41

**HOW TO CITE THIS ARTICLE:** Auda Jabbar Braihi, Jaleel Kareem Ahmed, Dalal abbass Kadham. (2017). "Preparing Medical (Polyvinyl Alcohol-Iodine) As A Pressure Sensor and Investigating Its Physical Properties." , *International Journal of Pharmaceutical and Phytopharmacological Research*, 7(1), pp.34-41.

## INTRODUCTION

Piezoelectric materials convert energy between mechanical and electrical domains [1]. The necessary condition for the piezoelectric effect is the absence of symmetry center in the crystal structure. This effect is formed in crystals that have no symmetry center. Each molecule in these crystals has a polarization, one end is more negatively charged and the other end is positively charged and is a dipole. The polar axis is an imaginary line that runs through the center of both charges on the molecule. In a monocrystal, the polar axes of all dipoles lie in one direction. The crystal is said to be symmetrical because if the crystal is cut at any point, the resultant

polar axes of these two pieces would lie in the same direction as the original.

If the lead zirconate titanate is placed between two electrodes and a pressure causing a reduction of only 1/20<sup>th</sup> of one millimeter is applied, a 100,000-volt potential is produced.

The basic equations of piezoelectricity are:

$$P = d \times \text{stress}$$
$$\text{and } E = \text{strain} / d$$

Where,

P = Polarization,

E = generated electric field and

d = piezoelectric coefficient in meters per volt.

**Corresponding author:** Auda Jabbar Braihi

**Address:** Polymer and petrochemical industries, college of Engineering material, Babylon University, Iraq

**e-mail** ✉ dalalabs035@gmail.com

**Relevant conflicts of interest/financial disclosures:** The authors declare that the research was conducted in the absence of any commercial or financial relationships that could be construed as a potential conflict of interest.

**Received:** 12 August 2016; **Revised:** 04 February 2017; **Accepted:** 26 February 2017



Piezoelectric materials may be natural (quartz, Rochelle salt, topaz, silk, wood, enamel, dentin, bone, hair) or man-made (crystals that are quartz analogs, ceramics, polymers and composites). Only 20 of the 32 crystal classes allow piezoelectric properties [2]. Ten of these classes are polar, i.e. they show a spontaneous polarization without mechanical stress due to a non-vanishing electric dipole moment associated with their unit cell. The remaining 10 classes are not polar, i.e. polarization appears only after applying a mechanical load [3].

Traditional ceramics such as quartz, lead zirconate titanate (PZT), and Barium titanate show good piezoelectric property, but it cannot be used in biomedical applications due to its rigid and high acoustic impedance characteristics of piezoelectric crystals. However, polymers like Poly vinyl carbonate (PVC), Nylon 11, and polyvinylidene fluoride (PVDF) also show piezoelectricity and are light weight and flexible [1].

Transient pressure measurement used to study explosives, combustion engine (knock sensors) and any other vibrations, accelerations, or impacts.

Electrical conduction is the process of electric charges transfer through a medium from one place to another under the influence of electric field. Electrical conduction depends on two factors: First, the type of charge carriers ( $n$ ). It can be electrons, holes or ions automatically generated due to the addition of impurities. The second is the mobility ( $\mu$ ), which depends on temperature ( $T$ ) and the applied potential ( $V$ )."

Polymers of special structure (alternating) have the properties of semiconductors, whereas most commercial polymers are insulator. Given that polymers are easily formed, chemists and physicists started to develop conductor polymers characterized by alternating double bonds since mid the twentieth century"

In its stable state, alternating polymers are insulators or semiconductors because it is not easy for electrons to transfer from one chain to another. These insulator polymers can be transformed into conductors by adding small molecules (impurities or dopants) by doping process. Dopants can operate as oxidizing or reducing factors. Charge transfer complexes can be created between dopants and polymers that make these polymers conductors [4].

The D.C electrical conductivity of polymers depends on the free ions, which are not chemically connected to the large molecules [5]. Polarization can be electronic, ionic, orientation and interfacial type.

Electronic Polarization ( $P_e$ ) occurs due to distortion in the distribution of the charge as a result of an external electrical field. A separation occurs between the nucleus positive charge and the center of the negative charge, which results in generating induced dipoles; this takes place in a very short time ( $10^{-15}$ s) and is independent on temperature [6].

Ionic Polarization ( $P_i$ ) was formed in an ionic compound having ionic characteristics. It takes place when the matter is under an electric field, which changes the ionic bond lengths resulting in the generation of a net dipole moment that has not been existed in the molecule before.

It lasts for a short time ( $10^{-13}$  -  $10^{-11}$  s). This type of polarization is independent on temperature.

Rotational or Orientation Polarization ( $P_d$ ) happens in molecules having permanent dipole moment. On applying an electric field, the dipoles revolve around the axis and arrange in the field direction. This type of polarization depends on temperature, and takes a considerable time to occur [7].

Space Charge or Interfacial Polarization ( $P_0$ ) takes place when a matter contains impurities, vacuum or structural flaw resulting in the concentration of opposite charge on the impurity terminals; this means the generating of dipoles in the atom, molecule or region of the matter. This type of polarization depends on the homogeneity of the matter and the rate of being free from impurities. It mostly takes place in radio waves and can extend to below audio frequencies depending on the flaw causing the polarization [8].

The energy gap ( $E_g$ ) is very much greater in insulators than in conductors and semiconductors; and the conduction band is empty of electrons, which are distributed in insulators at lower energy levels of the valence band, making them strongly bound to the atom with little movement. To be released, these electrons require high energy to be able to transfer to a higher energy level, weaken their binding to the atom, and facilitate their movement among atoms [4].

## 2. Experimental part

### 2.1 Materials

Poly (vinyl alcohol) was purchased from Verdean house, Daryaganj, New Delhi-110002 (India) with the degree of hydrolysis (86.0 -89.0 %) and molecular weight of 85,000 g / mole.

Iodine purchased from Merck (Darmstadt, Germany) with the density at 20°C is 4.93 g.cm<sup>-3</sup> and melting point is 114 °C.

### 2.2 Preparation of PVA/I<sub>2</sub> film

PVA/Iodine films were prepared by mixing PVA solution with I<sub>2</sub> solution. PVA solution was prepared by dissolving (1g) PVA powder in 40 ml distilled water (DW) with continuous stirring for 15 min in 70°C. I<sub>2</sub> solution was prepared by grinding the iodine molecules, adding I<sub>2</sub> powder to DW by 2, 4 and 6 wt. % ratios and leaving these solutions for three hours in sealed glass container at the room temperature.

### 2.3 Tests

HIOKI 3532-50 Hi TESTER used to measure the dielectric parameters, SHIMADZU DIFFRACTO meter XDR – 6000, LABX used to evaluate the crystallite behavior, SHIMADZU DSC-60 used to measure  $T_g$  and Electrometer (Keithly)(type2400) 60-200 bar used to investigate the piezoelectric tendency.

## 3. Results and Discussion

### 3.1 Piezoelectric Results

Figure 1 shows the effect of pressure on the electrical resistance of the prepared samples. It is clear that the electrical resistance of these samples were affected by changing the applied pressure. It means that these samples exhibited piezoelectric phenomena, especially the 6 wt.% mixture.

This piezoelectric mixture has a crystalline region with an internal dipole moment. These dipole moments are randomly oriented without any mechanical or electrical poling process, and in this condition, the net dipole moment is zero and has no piezoelectric response [2]. But, with post processes such as mechanical stretching and a high electric field, crystalline regions inside the bulk film will align in electric field direction [2]. When an electric field is applied to a piezoelectric material, deformation ( $D_L$ ) or strain ( $D_L/L$ ) arises. When

the field alternates, mechanical vibration occurs, and if the drive frequency is adjusted to a mechanical resonance frequency of the device, a large resonating strain is generated. This phenomenon can be understood as a strain amplification due to accumulating input energy with time (amplification in terms of time), and is called piezoelectric resonance. The amplification factor is proportional to the mechanical quality factor  $Q_M$ . Piezoelectric resonance is very useful for realizing energy trap devices, actuators, etc. [3].

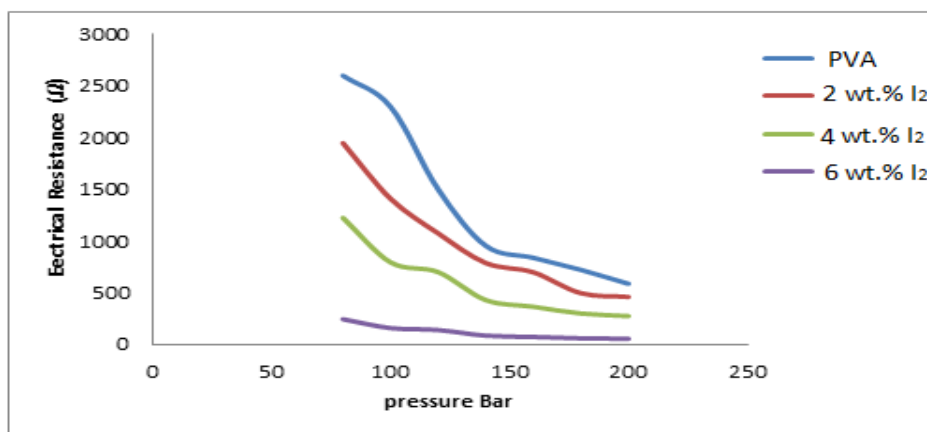


Fig. 1: piezoelectric behavior of pure PVA and PVA: I<sub>2</sub> mixtures

### 3.2 Electrical measurements

Figure 2 shows the relationship between volume electrical conductivity of (PVA: I<sub>2</sub>) mixtures with the temperature.

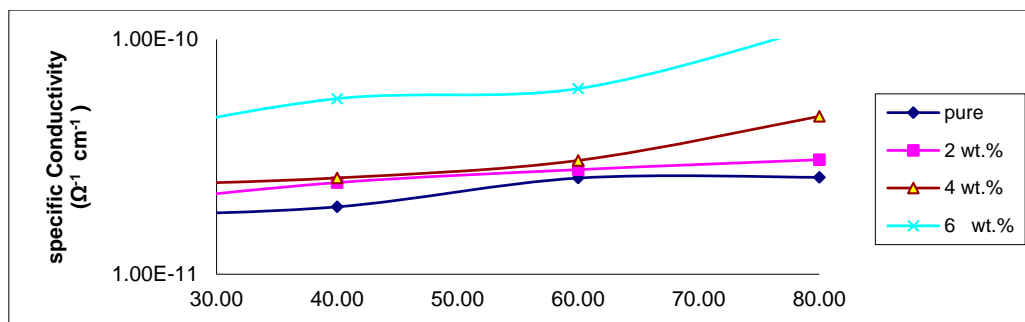


Fig.2: D.C electrical conductivity with temperature of (PVA: I<sub>2</sub>) mixtures

It is clear that conductivity increased for any certain temperature with rising iodine concentration. The reason is that the high charge carriers increase linearly with the surging filler content [10].

Ordinary, electrical conductivity increases as a function

of temperature due to rising the energy of the conductive electron and enhance its transition to the conduction band. Figure 3 shows the variation of the dielectric constant of PVA: I<sub>2</sub> composites with angular frequencies.

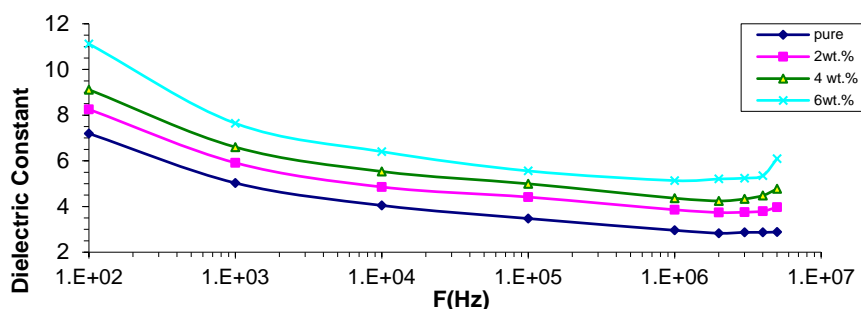


Fig. 3: Variation of the dielectric constant of PVA:I<sub>2</sub> mixtures with angular frequency

The dielectric constant values decreased with enhancing applied frequency. The high frequencies result in decreasing space charge polarization to the total polarization. The space charge polarization becomes more contributing type of polarization at low frequencies, and less contributing with the increase of frequency, this would result in decreasing dielectric constant values with the increase of frequency up to  $1 \times 10^7$  Hz. The other types of polarizations appear at subsequent frequencies. The ionic polarization reacts slightly to the variation in the field frequencies compared with electronic polarization;

this is because the mass of ion is greater than that of the electron. The electrons respond to even high frequencies of the field vibrations. The low mass of electron makes the electronic polarization the only type of it at higher frequencies; this makes the dielectric constant approximately stable for all samples at high frequencies [11].

Figure 4 shows the dielectric loss of PVA: I<sub>2</sub> mixtures. It is clear that the dielectric loss increase linearly with I<sub>2</sub> concentration. This is due to the created voids of iodine sublimation.

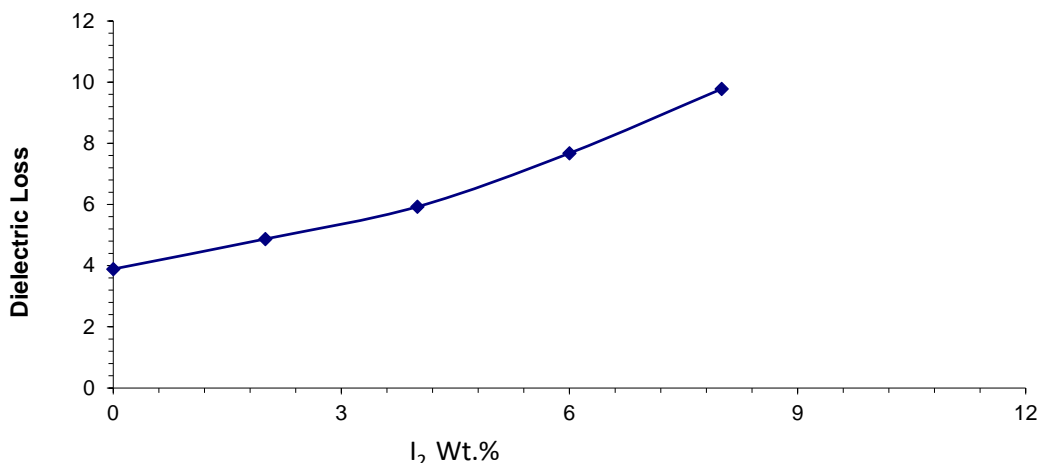


Fig. 4: Dielectric loss as a function of I<sub>2</sub> concentration

Figure 5 shows the dielectric loss as a function of the angular Frequency.

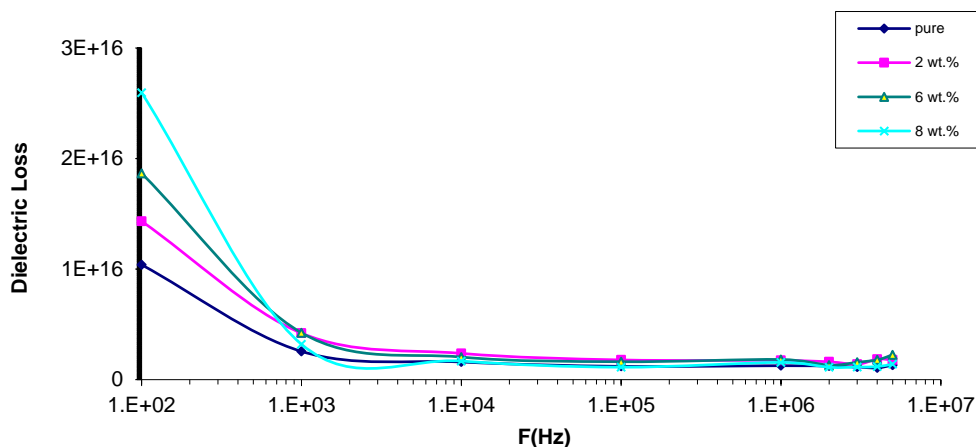


Fig. 5 : Dielectric loss as a function of the angular frequency

The dielectric loss decreased firstly that is the lowest absorption of applied field. This absorption happens due to Maxwell - Wagner phenomenon that is caused by A.C current from the difference of dielectric constant and conductivity of the phases in the composite. When the frequency (f) increases, the dielectric loss is approximately constant. This is attributed to the mechanisms of other types of polarization that occurs at high frequencies [12].

Figure 6 shows the A.C conductivity of (PVA: I<sub>2</sub>) mixtures with iodine concentration at 50 Hz and 25oC. The A.C conductivity increased with enhancing iodine concentrations. This increase is due to the effect of the space charge polarization. The ions of iodine take the form of clusters or separated groups. This increase is in the result of high ionic charge carriers and formation of a continuous network of iodine ions inside the mixture. Consequently, the conductivity is increasing with rising iodine concentration [13].

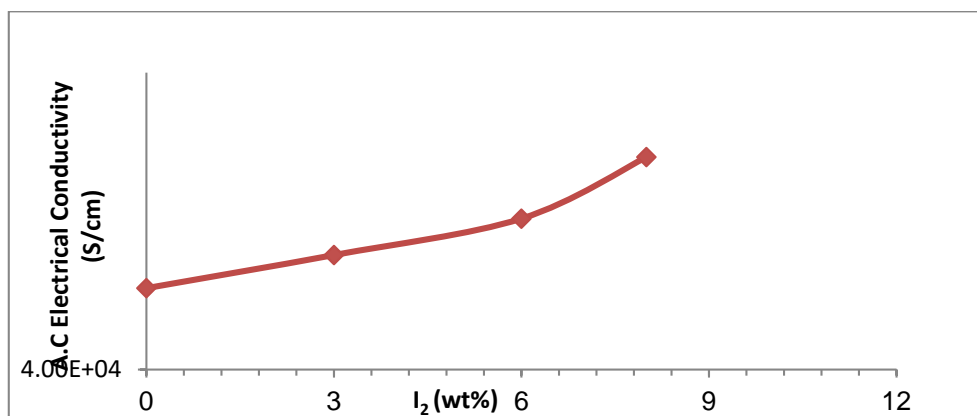


Fig. 6 : The A.C conductivity of (PVA: I<sub>2</sub>) mixtures with I<sub>2</sub> content

### 3.3 X-Ray Results:

Figure 7 shows the crystallinity behavior of pure PVA and for PVA: I<sub>2</sub> mixture with 6 wt.% I<sub>2</sub>. It is clear from table 1 that I<sub>2</sub> addition increase the position of the general peak from 2θ = 17.6089 deg to 20.9003 deg. The reason is that iodine is a crystalline

element and extends the theta value, thus the space between the planes will be decreased according to Bragg law ( $n\lambda = 2d \sin \theta$ ). This is in agreement with changing the value of d-spacing from 5.03258 Å to 4.24689 Å

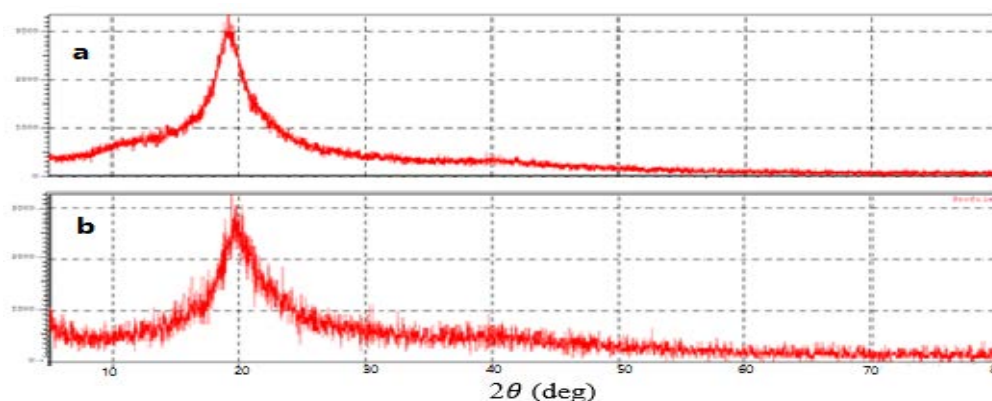


Fig. 7 : XRD pattern for (a) pure PVA and (b) 6wt.% mixture

According to Scherer's equation ( $size = \frac{k\lambda}{\beta \cos \theta}$ ), the crystallite size increased from 5.535 nm for pure PVA to 7.03696 nm for mixture with 6wt.% I<sub>2</sub>.

In this calculation k (shape factor) taken as 0.89 and λ is x-ray wavelength equal to 1.5418 Å. The following equation was used to convert from degree to radius.

$$R = \frac{\pi D}{180}$$

Where D is degrees, R is radius, π = 3.14

#### 1-Pure PVA

$$\theta \text{ in radius} = \frac{\pi 8.80445}{180} = 0.7853975$$

Converting β from degrees to radius :  $\beta = \frac{\pi 1.6}{180} = 0.027952268$

$$size = \frac{k\lambda}{\beta \cos \theta} \quad (\text{Scherer's equation})$$

$$\begin{aligned} \therefore size &= \frac{0.89 * 1.5418}{0.02795226 * \cos(0.7853975)} = 55.35 \text{ Å} \\ &= 5.535 \text{ nm} \\ &= \frac{2 \cos(0.7853975)}{1.5418} = 1.2970632377 \end{aligned}$$

#### 2. By addition 6 wt.% I<sub>2</sub> to PVA :

Repeat the same calculations but for 2θ = 20.9003 deg, β = 1.12 deg and d-spacing = 4.24689 Å, results shown in table (1).

**Table 1:**XRD Parameters for pure PVA and 6wt.% mixture

Sample	2θ (deg)	θ (rad)	d-spacing (Å)	β (deg)	β (rad)	Scattering function
0%	17.6089	0.7853975	5.03256	1.6	0.02795226	1.2970632377
6%	20.9003	0.1823894	4.24689	1.12	0.0195377778	1.2970509981

Scattering functions for the pure PVA and the 6 wt% mixture were calculated from the following equation:

$$\text{Scattering function} = \frac{2 \cos \theta}{\lambda}$$

and the results were shown in table 2, which indicate the slightly decreasing in scattering function due to the increasing in the crystallinity.

**Table 2:** Scattering functions for pure PVA and 6 wt.% mixture

Sample	Scattering function
0	1.2970632373
6 wt%	1.2970509981

### 3.4DSCResults

Figure 8 shows the DCS analysis of pure PVA and (PVA:I<sub>2</sub>) mixtures. The activation can be calculated as follows:

$$E_a = \Delta H^\ddagger + RT \quad [14]$$

Where:

E<sub>a</sub>: activation energy (kJmol<sup>-1</sup>), ΔH<sup>‡</sup>: activation enthalpy (kJ mol<sup>-1</sup>),

RT: thermal energy (work); RT=P dV(kJ mol<sup>-1</sup>).

According to molecular models (the activation energy for chain rupture is about 60 kCal/mol (251 kJ mol<sup>-1</sup>), so that at room temperature the value of the decisive factor for chain rupture as a thermal fluctuation process is about 101[15].

$$\therefore E_a = \Delta H^\ddagger + RT = RT D_f$$

Where:

R:the gas constant (0.0083 kJ K<sup>-1</sup> mol<sup>-1</sup>)

T: the absolute temperature (K)

D<sub>f</sub>:decisive factor E<sub>a</sub> at R.T=251 kJ mol<sup>-1</sup>

$$E_a = \Delta H^\ddagger + RT = 251$$

Since RT value small at room temperature which is equal to 2.47 kJ mol<sup>-1</sup> comparing with ΔH<sup>‡</sup>:

$$\therefore \Delta H^\ddagger \gg RT$$

$$\therefore E_a = \Delta H^\ddagger = RT D_f$$

$$E_a = 0.0083 \text{ kJ K}^{-1} \text{ mol}^{-1} * 298.15$$

$$K * D_f = 251 \text{ kJ mol}^{-1}$$

$$D_f = 101.43$$

$$\text{Each unit of } D_f = \frac{251}{101.43} = 2.475 \text{ kJ mol}^{-1}$$

#### 1. Pure PVA

T<sub>g</sub> of pure PVA= 95.57 °C (from fig a)

$$E_a = RT D_f$$

$$251 = 0.0083 * 368.57 * D_f \rightarrow D_f = 82.049$$

$$\Delta D_f = D_f \text{ at R.T} - D_f \text{ at } 95.57 \text{ °C}$$


$$= 101.43 - 82.049 = 19.38$$

Addition E<sub>a</sub> from different temperatures (25 to 95.57°C):

$$= \Delta D_f * \text{Each unit of } D_f = 19.38 * 2.475 = 47.718 \text{ kJ mol}^{-1}$$

$$E_a \text{ (at } 95.57^\circ\text{C)} = 251 - 47.718 = 203 \text{ kJ mol}^{-1}$$

$$\Delta T = 95.57 - 25 = 70.57 \text{ °C}$$

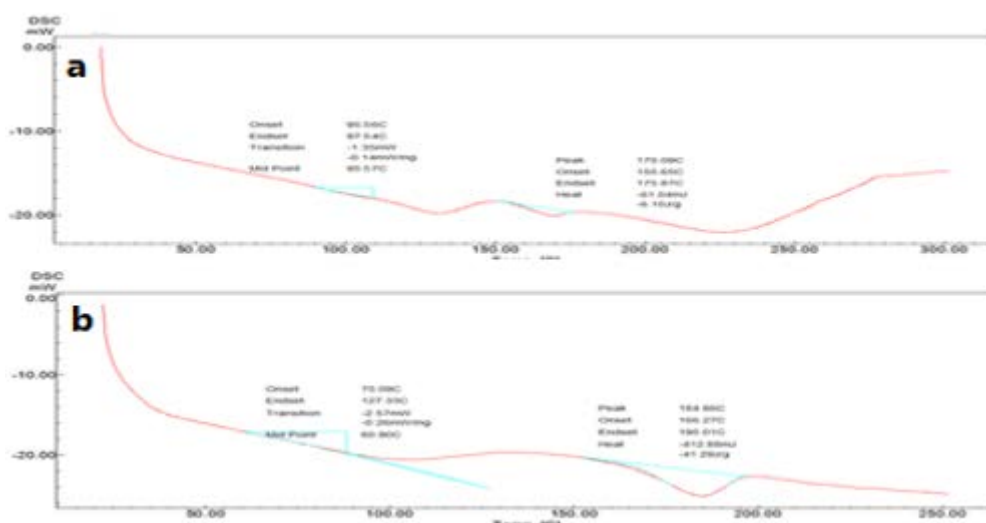

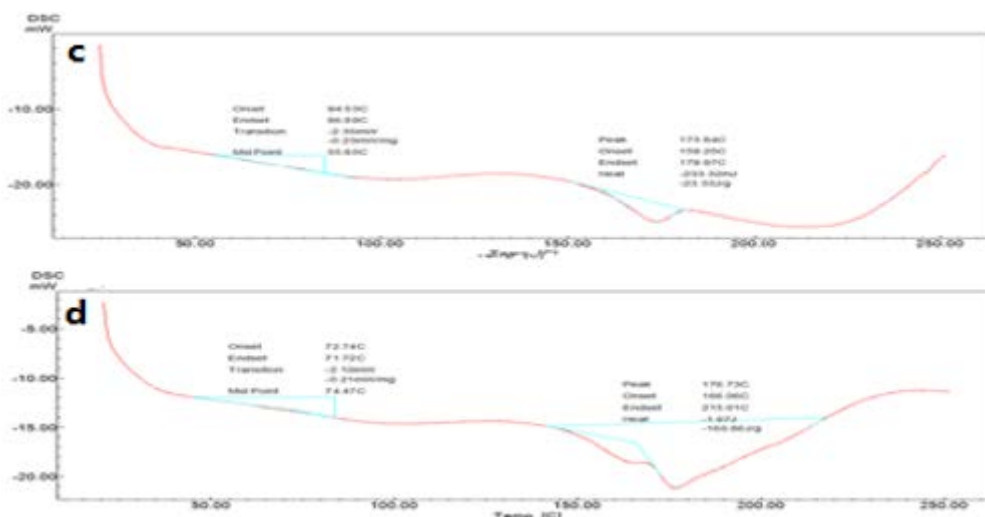


Fig.8: DSC curves for (a) pure PVA (b) 2 wt.% mixture (c) 4 wt.% mixture (d) 6 wt.% mixture

$$1^{\circ}\text{C} = \frac{\text{addition } E_a}{\Delta T} = \frac{203}{70.57} = \text{kJ mol}^{-1}$$

**2. For 2wt.% composite**

The temperature of chain rupture falls to 60.9°C due to addition 2% I<sub>2</sub> to the PVA (Figure b)

$$\therefore T_g = 60.90^{\circ}\text{C}$$

$$E_a = RTD_f$$

$$251 = 0.0083 * 333.9 * D_f \rightarrow D_f = 90.569$$

$$\Delta T = 60.9 - 25 = 35.9^{\circ}\text{C}$$

Addition E<sub>a</sub> from different temperatures from 25 to 60.9 °C:

$$= 35.9^{\circ}\text{C} * 0.679 \text{ kJmol}^{-1}\text{ }^{\circ}\text{C} = 24.3761$$

$$\text{Given energy by I}_2 \text{ addition} = 47.718 - 24.3761$$

$$= 23.5907 \text{ kJ mol}^{-1} \text{ (this given by 2wt.\% I}_2)$$

$$E_a \text{ (at } 60.9^{\circ}\text{C)} = 203 - 23.5907 = 179.4093 \text{ kJ mol}^{-1}$$

**3. For 4 wt.% composite**

The T<sub>g</sub> falls to 55.85 °C due to addition 4% I<sub>2</sub> (Figure c)

$$\therefore T_g = 55.86^{\circ}\text{C}$$

Repeat the same calculations for T<sub>g</sub> = 55.85°C, result shows in table 2.

**4. For 6 wt.% composite**

The temperature of chain rupture falls to 50 °C due to addition of 6wt% of I<sub>2</sub>(figure d). ∴ T<sub>g</sub> = 50 °C

Repeat the same calculations for T<sub>g</sub> = 50°C (table 2).

Results are arranged in table 2, and compared with the value of energies of the secondary bonds (table 3). This indicates that the types of destroyed bonds due to I<sub>2</sub> addition are Van der Waals bonds and Dispersion (London) forces.

**Table 2:** Effect of I<sub>2</sub> on PVA at R.T & E<sub>a</sub> (251 kJ mol<sup>-1</sup>) with D<sub>f</sub> = 101.43

Sample	T <sub>g</sub> (°C)	D <sub>f</sub>	E <sub>a</sub> at T <sub>g</sub> (kJ mol <sup>-1</sup> )	Addition E <sub>a</sub> (kJ mol <sup>-1</sup> )
Pure PVA	95.57	82.049	203	47.718
2wt% I <sub>2</sub>	60.90	90.569	179.40	24.3761
4wt% I <sub>2</sub>	55.85	91	153.020	20.94715
6wt% I <sub>2</sub>	50	93.63	149.082	16.975

**Table 3:** Expected destroyed secondary bond by Iodine in PVA.

Sample	Given energy by addition pigment (kJ mol <sup>-1</sup> )	Secondary bond energy [4] (kJ mol <sup>-1</sup> )	Expected type of destroyed bond
2wt% I <sub>2</sub>	23.5907	0.08-40	(Van der Waals bonds)
4wt% I <sub>2</sub>	27.01965		Dispersion (London) forces
6wt% I <sub>2</sub>	30.9918		



### **Conclusion :**

- 1-D.C conductivity increased with I<sub>2</sub> content temperature as well as this conductivity increased with increasing temp.
- 2-the dielectric constant decreases with the angular frequency.
- 3-The A.C conductivity increased with I<sub>2</sub> content as well as with angular frequency.
- 4-Decreasing the d-spacing and increasing the crystallite size.
- 5- The T<sub>g</sub> decreased with increasing I<sub>2</sub> content followed by decreasing the decisive factor.
- 6- Composite sample, especially 6 wt.% sample exhibited piezoelectrical phenomenon.

### **References**

- 1-T.H. Kim ,Characterization and applications of piezoelectric polymers, Technical Report No. UCB/EECS,2015-253,(2015).
- 2-P. Dineva, Piezoelectric Materials , Springer International Publishing Switzerland , (2014).
- 3- Kenji Uchino,Advanced Piezoelectric materials, Woodhead Publishing Limited, Oxford Cambridge Philadelphia New Delhi , (2010) .
- 4 - H . Younis, Study of Electrical Conductivity of Some Conjugated Polymers in Their Pure and Doped States With Emphasis on Acidic Doping, Ph.D. Thesis, College of Science, University of Mousl , (2002).
- 5- E. AL- Rabthi," University Physics", Jordan, (2006).
- 6 - S.Saed,S.Shakir, Y.Mawlood, ,Physics Solid State, University of Mousl, 21,3273-3287,(1988)
- 7- A. Adel, Materials Science and Electrical Properties, Publications of Gar Younis University, Benghazi ,1stEd. (1994).
- 8 -W . Kingery ,Introduction to Ceramics, John wiley of sons , Inc,New York , (1976).
- 9- K. Obeid,Preparation and Study Some of Electrical and Thermal Properties of a Nematic Liquid Crystal Material Prepared from Schiff Bases and Some its Complexes, M.Sc. Thesis, Babylon University ,Collage of Science, )2010).
- 10 - S. Bhattacharyya, S.Basu, and S. De,Effect of Temperature on the Electric Properties of (PVC-Cu) Composites",J.APPL.Polym.Sci,25, 111-118, (1980).
- 11- C. Chiteme , S. Lowther and S. Harrison , J.of Polym. Science, 43,1, 3273-3287, 2005 .
- 12- S. Satapathy , P. Gupta , K. Varma , P. Tiwari and V. Ganeshan , "Study on Dielectric Behavior of Lithium Tantalate (LT) Nano Particle Filled Poly(Vinylidene Fluoride) (PVDF) Nano Composites", Institute of Science, Srinu73@cat.ernet.in,India, 2008 .
- 13-M. Alvarez, V. Pobleto ,M. Pilleux and V. Fuenzalida ,  
Submicron

Copper- Low- Density polyethylene Conducting Composites: Structural , Electrical and percolation Threshold, Comision Chilena de Energia Nuclear, Chile, 2008 .

14-Fa-Ai Zhang, cheng, and Cai-Li Yu,Effect of Preparation Methods on The Property of PMM/SBA-15 Mesoporous silica Composites ,J Polym Res, Springer Science +Business Media B.V, 18, 1757-1764, (2011).

15- G. G.D Sliver ,Silva, P.V.A. Sobral, R. A. Carvalho, P. V. A. Bergo, O. Mendieta-Taboada and A. M. Q. B. Habitate,Biodegradable Films Based on Blends Of Gelatine And Poly(Vinyl Alcohol):Effect of Pva Type or Concentration on Some Physical Properties of Films,Jpolym Environ Springer , 16, 276-285,(2008).